

# TRAILCO®

## T200-2 TRAVELLER

**FOR USE WITH ANGUS HOSES:**  
63.5mm (2.5") x 100m, 150m & 200m  
76mm (3") x 100m



**Extreme Versatility:** The travellers will irrigate a very wide range of crops and will operate well in very irregular shaped fields and on extremely undulating terrain.

**Very Low Labour Requirement:** Several travellers can easily be operated by one man and the labour consists mostly of driving a tractor.

**Portable:** The travellers are ideal for irrigating widely scattered areas. They can be towed from field to field or farm to farm.

**Excellent Water Uniformity:** The continuous movement of the traveller provides a high uniformity of water application. Distribution of the water is very even.

**Ability To Work Around Obstructions:** The travellers are compact units and can operate around power poles, trees or buildings with no problem.

**Easy To Use:** The travellers are uncomplicated and easy to operate.

**Long Life & Simple Maintenance:** The units are built from long life components and require a minimum of maintenance.

**Designed & Manufactured in Australia:** Trailco Traveller is designed and manufactured in Australia and is backed by an Australian wide dealer network for sales and service.

PERFORMANCE TABLE TRAILCO T200-2 TRAVELLER																								
SPRINKLER	Nozzle Diameter		Sprinkler Pressure		Output		Wetted Width		Approx. Lane Spacing		Full Circle Precipitation Rate (avg.)		200 METRE (10 CHN) RUN				300 METRE (15 CHN) RUN							
			* kPa PSI		* Lp.s GPM		* m ft.		* m ft.		mmph p.p.h		Approximate area per run		Gross Application				Approximate area per run		Gross Application			
	mm	ins	kPa	PSI	Lp.s	GPM	m	ft.	m	ft.	mmph	p.p.h	ha	Ac	11 Hour Run		22 Hour Run		ha	Ac	11 Hour Run		22 Hour Run	
NELSON	18.0	0.71	414	60	5.15	68	69	228	45	148	5.6	22.0	0.90	2.23	22.6	0.89	45.1	1.78	1.36	3.35	15.0	0.59	30.1	1.18
			483	70	5.30	70	72	237	47	154	5.3	20.9	0.94	2.32	22.3	0.88	44.7	1.76	1.41	3.48	14.9	0.59	29.8	1.17
SR100R	19.5	0.77	414	60	6.06	80	71	232	46	151	6.3	25.0	0.92	2.27	26.1	1.03	52.2	2.06	1.38	3.41	17.4	0.69	34.8	1.37
			483	70	6.59	87	74	243	48	158	6.3	24.8	0.96	2.38	27.1	1.07	54.2	2.13	1.44	3.57	18.1	0.71	36.1	1.42
21°	20.6	0.81	414	60	6.97	92	72	237	47	154	7.0	27.5	0.94	2.32	29.4	1.16	58.8	2.31	1.41	3.48	19.6	0.77	39.2	1.54
			483	70	7.43	98	77	252	50	164	6.6	26.0	1.00	2.47	29.5	1.16	58.9	2.32	1.50	3.70	19.6	0.77	39.3	1.55
21°	21.8	0.86	414	60	7.88	104	77	252	50	164	7.0	27.5	1.00	2.47	31.3	1.23	62.5	2.46	1.50	3.70	20.8	0.82	41.7	1.64
			483	70	8.56	113	81	267	53	174	6.8	26.6	1.06	2.61	32.0	1.26	64.1	2.52	1.59	3.92	21.4	0.84	42.7	1.68
21°	22.7	0.89	414	60	8.94	118	80	262	52	170	7.3	28.9	1.04	2.57	34.1	1.34	68.2	2.69	1.56	3.85	22.7	0.90	45.5	1.79
			483	70	9.63	127	86	281	56	183	6.9	27.1	1.11	2.75	34.2	1.35	68.5	2.70	1.67	4.13	22.8	0.90	45.7	1.80
21°	23.6	0.93	414	60	10.38	137	81	267	53	174	8.2	32.3	1.06	2.61	38.9	1.53	77.7	3.06	1.59	3.92	25.9	1.02	51.8	2.04
			483	70	11.22	148	87	286	57	186	7.7	30.4	1.13	2.80	39.2	1.54	78.4	3.09	1.70	4.20	26.1	1.03	52.3	2.06
21°	24.5	0.96	414	60	11.60	153	83	272	54	177	8.8	34.8	1.08	2.66	42.6	1.68	85.2	3.36	1.62	3.99	28.4	1.12	56.8	2.24
			483	70	12.51	165	89	291	58	189	8.3	32.8	1.15	2.85	43.0	1.69	85.9	3.38	1.73	4.27	28.6	1.13	57.3	2.26
NELSON	21.8	0.86	483	70	7.58	100	80	262	52	170	6.2	24.5	1.04	2.57	28.9	1.14	57.8	2.28	1.56	3.85	19.3	0.76	38.6	1.52
			552	80	8.11	107	83	272	54	177	6.2	24.3	1.08	2.66	29.8	1.17	59.6	2.35	1.62	3.99	19.9	0.78	39.7	1.56
SR150R	24.6	0.97	483	70	9.78	129	86	281	56	183	7.0	27.5	1.11	2.75	34.8	1.37	69.6	2.74	1.67	4.13	23.2	0.91	46.4	1.83
			552	80	10.38	137	89	291	58	189	6.9	27.2	1.15	2.85	35.6	1.40	71.3	2.81	1.73	4.27	23.8	0.94	47.5	1.87
21°	27.4	1.08	483	70	12.43	164	92	301	60	196	7.7	30.4	1.19	2.95	41.3	1.62	82.5	3.25	1.79	4.42	27.5	1.08	55.0	2.17
			552	80	13.27	175	94	310	61	202	7.8	30.6	1.23	3.04	42.8	1.68	85.6	3.37	1.84	4.55	28.5	1.12	57.0	2.25
21°	30.0	1.18	483	70	15.47	204	98	320	63	208	8.5	33.5	1.27	3.13	48.3	1.90	96.6	3.80	1.90	4.70	32.2	1.27	64.4	2.54
			552	80	16.45	217	101	330	65	215	8.5	33.5	1.31	3.23	49.8	1.96	99.6	3.92	1.96	4.85	33.2	1.31	66.4	2.62
21°	32.0	1.26	483	70	18.65	246	104	340	67	221	9.1	35.8	1.35	3.33	54.8	2.16	109.6	4.32	2.02	4.99	36.5	1.44	73.1	2.88
			552	80	19.86	262	106	349	69	227	9.2	36.2	1.38	3.42	56.9	2.24	113.7	4.48	2.07	5.13	37.9	1.49	75.8	2.99
21°	34.0	1.34	483	70	22.44	296	108	354	70	230	10.1	39.7	1.40	3.47	63.4	2.49	126.7	4.99	2.10	5.20	42.2	1.66	84.5	3.33
			552	80	24.03	317	112	369	73	240	9.9	39.1	1.46	3.61	65.1	2.56	130.2	5.12	2.19	5.42	43.4	1.71	86.8	3.42

NOTE:- APPROXIMATE LANE SPACINGS CALCULATED USING 0.65 WIND FACTOR, (65% OF THE WETTED WIDTH) SPRINKLER (ELECTRICAL).

MINIMUM WARRANTED PULL ... AT 582kPa (70psi) ... UP TO 12460N (2800lbs) PULL.

\* Sprinkler performance is based on the M manufacturers data which has been obtained under ideal test conditions and may be adversely affected by wind or other factors.

Trailco Irrigation makes no representation regarding droplet condition, uniformity or application rate.


### FEATURES:

- **Trailco-Proven Piston Drive** - Efficient Trailco patented piston drive, with virtually no pressure loss through the drive system, giving you big savings on your yearly pumping costs. Less maintenance, no sprockets and chains to wear, no gear boxes, belts or pulleys to malfunction.
- **Drive Unit** having large powerful double action piston and a mechanically actuated valve (All Gunmetal & Stainless Steel construction). Single main valve with no pilot and shut off valves, that gives you simple, trouble free and reliable operation. The piston is double acting, giving positive power with each stroke of the piston (no lost motion) ensuring that all of the power developed is used to power the cable drum. Also provides a wide range of travel speeds to suit your particular crop water requirements.
- **Compact Concept** with very short turning circle for easier handling, mounted on four wheels for stability.
- **Longer Life** - All main parts galvanised or plated for maximum protection.
- **Angus Premium Hi-Flow Hose**, top quality irrigation hose which carries a 10 year Warranty.
- **Automatic Shut-Off** - The forward movement of the irrigator is stopped automatically by the automatic shut-off mechanism at the end of the spray run.
- **Constant Travel Speed** means excellent water uniformity. Speed adjustment by controlling exhaust water from the piston drive with a ball valve and exhaust jets. The exhaust jets are angled for wide distribution of exhaust water.
- **Steering Mechanism** - Accurate automotive type steering mechanism for maximum stability and excellent tracking.
- **Cable Drum Brake** - prevents over-run and possible damage when towing out cable.
- **Cable Drum Rewind Handle** for easy cable retrieval on an aborted run and to take up slack cable prior to start-up.
- **Automatic Start-up** - Mechanically activated self engagement mechanism for automatic start-up and forward travel, lessening the need to return to the irrigator following start-up.
- **Hose Side Lay Arm** - lays hose to either side of laneway. Well outside travel path of irrigator.
- **Hose Reel** - Specially constructed spool, built with flat base for maximum hose protection and longer hose life.
- **PTO Rewind Hose Reel** - The Hose Reel is PTO driven for retrieving the hose, PTO shaft permanently attached to the front of the irrigator allowing the retrieval of the hose to be carried out from the towing position.
- **Self Cleaning Filter Element** - to protect drive unit.
- **Easy to service** - All serviceable parts conveniently located for ease of maintenance and adjustments.
- **Pressure Gauge** - Sprinkler fitted with high quality liquid filled pressure gauge.

### OPTIONAL EXTRAS:

- **4 - 5.20 x 10" Tyres** on alloy wheels.
- **Sprinkler tilt Coupling** designed to assist in combating the effects of wind by varying trajectory angle of sprinkler.
- **Bolt on Rear Wheel Brakes** - for conditions where sprinkler over-run is a problem. The brakes release automatically when hose drag is sufficient. Allows the machine to start at the end of the travel path with the hose turned neatly behind the tyres, eliminating the need for a long anchor loop.

MODELS AVAILABLE TRAILCO T200-2			
MODEL	HOSE SIZE	SPRAY RUN	WEIGHT without Hose or Sprinkler
T200-2-5	63.5mm (2.5") x 100m	200m	348kg
T200-2-5	76mm (3") x 100m	200m	380kg
T200-2-7.5	63.5mm (2.5") x 150m	300m	380kg
T200-2-10	63.5mm (2.5") x 200m	400m	390kg

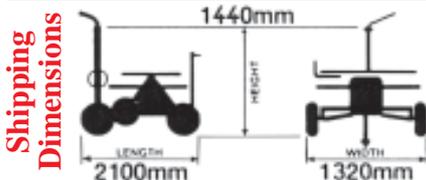


### TRAILCO IRRIGATION (AUST.)

ABN 35 480 117 190

1289 KINGSFORD SMITH DRIVE  
PINKENBA QLD. 4008

Phone (07) 3260 1828 Fax (07) 3260 1877  
International Callers: Country (61) Area (7)

www.trailco.com.au sales@trailco.com.au

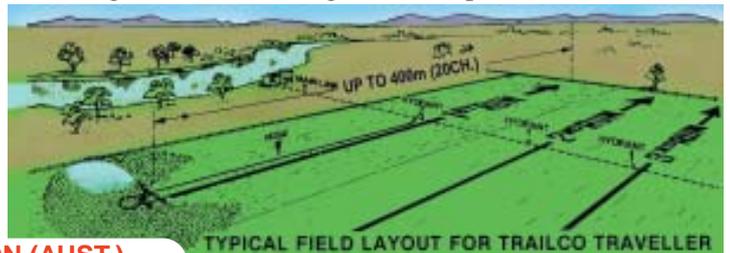

SOLD AND SERVICED BY: